

ABOVE & BELOW: Investigating Ceiling and Floor for Augmented Reality Content Placement

Appendix

In this appendix we provide (1) additional literature and its analysis with regard to the use of the ceiling and floor in AR, (2) further information regarding the placement of content on both areas, and (3) additional images from the study setup.

Technology	Ceiling	Floor
UbiComp Solutions		
▷ Monitor System	[16, 33, 34]	[15, 21, 28, 36]
▷ Stationary Projector	[4, 11, 19, 22, 29, 32–34, 37]	[1, 3, 5, 8–10, 13, 17, 23]
Personal Augmentation		
▷ Head-mounted Display	[24, 30]	[2, 18, 25, 31]
▷ Mobile Projector	[14]	[6, 7, 12, 20, 26, 27, 35, 38]

Table A1: Overview of 38 papers considering the content placement on the *ceiling* and the *floor*.

A DISPLAYING VIRTUAL CONTENT ON FLOOR AND CEILING

Displaying content above on the ceiling and below on the floor was already explored in several use cases, such as a visit to public spaces (e.g., museum) [25, 29], indoor guidance [1, 15, 25], outdoor guidance [2, 38], office work [4, 37], smart living spaces [5, 11, 19, 28], gaming [8], industrial applications [21], and for awareness and ambient displays [9, 13, 14, 17, 22, 33, 34]. To display content in these areas, monitor systems, stationary and wearable projectors, and HMDs were mainly used in previous works. We can group these works into *UbiComp solutions* and *personal augmentation* considering the used display technologies (see Tab. A1).

The majority of related work can be classified as *UbiComp solutions* using two display technologies: **(1)** Monitor systems with a single or multiple displays on the ceiling [33, 34] or on the floor [15, 28], as well as low-resolution displays consisting of individual LED units [36]; **(2)** Projector setups, either with rear projection on the ceiling [37] and floor [3] to avoid shadowing, or front projection on the ceiling [19] and floor [8]. As both display technologies are stationary and mostly directly embedded into the environment, it is possible to optimize the presentation of the virtual content to the environment. Furthermore, by using additional hardware (e.g., Kinect), it is possible to track further information which can be used for, e.g., foot or touch interaction [3, 5, 28] or position, posture, or gesture tracking [8–10, 17, 19, 36]. However, in these works, the augmentation is limited to the predefined local area and, through the global nature of such installations, presented content is always visible to all persons in this environment. Furthermore, areas of displays or the projection can be occluded by persons or objects.

A smaller group of the related literature could be classified as a *personal augmentation* using the following two display technologies: **(1)** Pico-projectors worn, e.g., in a handbag [14], around the neck [26], or at the waist of the user [7], as well as other mobile projectors, such as a projector-quadcopter [12]; **(2)** Head-mounted displays [25, 31]. These technologies allow a mobile and dynamic augmentation of the environment since they are directly bound to the user by, e.g., wearing such devices. In general, body-bound devices allow the presentation of additional virtual information in

any given environment, which is also visible in the number of use cases focused on navigational tasks (e.g., [24, 31, 35]). However, optimizing the display of these devices for the real-world environment is more challenging than using stationary setups embedded in the environment. Wearable projectors allow to augment a specific area on either the ceiling or the floor and are limited to the displayable area. In comparison, despite the low resolution of current OST HMDs, they enable to augment both the ceiling and the floor and other areas of the environment simultaneously while not being limited to the FoV of these devices. While Renner and Pfeiffer [25] and Thi Minh Tran and Parker [31] supported navigation task with the floor visualization, to the best of our knowledge, no previous studies have systematically investigated content placement both on the ceiling and the floor using AR HMDs.

While investigating foot-tap interaction with an interface displayed on the floor, Müller et al. [18] found that this kind of interface should be used for short-term and fine-grained interactions. Renner and Pfeiffer [25] showed that interfaces requiring the user to permanently look at the floor for the navigation task are not optimal considering the ergonomics. However, while comparing map locations for a simulated AR pedestrian navigation interface in a fully immersive virtual environment, Thi Minh Tran and Parker [31] found that participants prefer the display location on the floor in front of them than on their hands or as a floating display. In their study, Reiner et al. [24] compared displaying a 2D map in front of the user and a topographic layout of the terrain in the upper visual field in a route confirmation task. While simulating the task in a fully immersive virtual environment, they found that participants with prior virtual reality experience were more accurate during the task with the presentation in the upper visual field.

B CONTENT PLACEMENT PARAMETERS AND CONSTRAINS

To define the placement using the *world-stabilized*, or exocentric, reference frame (see Fig. A1, top row), we use a Cartesian coordinate system with rotation (α, β, γ) and translation (X, Y, Z) parameters. For the *body-stabilized*, or egocentric, reference frame (see Fig. A1, bottom row), we propose using a cylindrical coordinate system with the user’s position as its point of origin, a translation combined from the radius (r), azimuth (ϕ) and height (Z), and the rotation (α, β, γ) parameters, accordingly.

Those coordinate systems can be applied to both areas, splitting the coordinate systems into *floor* and *ceiling* variants that are mirrored to each other. This split and the need to keep the virtual content visible lead to a few constraints on the coordinate system parameters. First, as both variants are mirrored, the height (Z) and pitch (α) are also mirrored. Second, the pitch (α) is limited to the range of 0° to 90° . Hence, an angle of 90° means that the content is perpendicular to both areas, while at 0° , the content lies flat on either area and faces inwards. Third, the roll (β) should be blocked and always perpendicular aligned with either area to prevent the content from pervading the physical areas. Finally, the pivot point for the virtual content differs between both areas to ensure that content is always connected to the corresponding plane regardless of its orientation

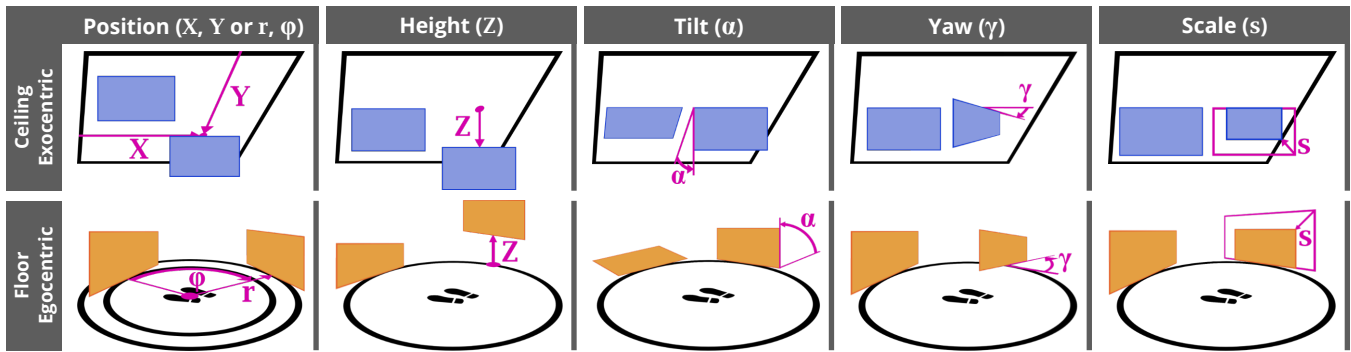


Figure A1: The placement parameters usable on *ceiling* and *floor*. Roll (β) is not included since it is not useful for a good placement. While the first row shows an *world-stabilized*, or exocentric, placement on the *ceiling*, the second shows an *body-stabilized*, or egocentric, placement on the *floor*. However, the opposite is also possible, which means to place content body-stabilized on the *ceiling* or world-stabilized on the *floor*.



Figure A2: Scene 3 of our first study. (A–C) illustrates the proximity-based interaction, while they also show show the point of view of the participants.

as long as the height (Z) is 0. This pivot point is at the top center or the bottom center for virtual content on the *ceiling* and the *floor*, respectively.

REFERENCES

- [1] L. Albarrak, O. Metatla, and A. Roudaut. Exploring the design of history-enriched floor interfaces for asynchronous navigation support. In *DIS 2020 - Proceedings of the 2020 ACM Designing Interactive Systems Conference*, pp. 1391–1403. Association for Computing Machinery, Inc, New York, NY, USA, 2020. doi: 10.1145/3357236.3395496
- [2] E. Anandapadmanaban, J. Tannady, J. Norheim, D. J. Newman, J. A. Hoffman, and C. Science. Holo-SEXTANT: An augmented reality planetary EVA navigation interface. In *Proceedings of the 48th International Conference on Environmental Systems*, 2018.
- [3] T. Augsten, K. Kaefler, R. Meusel, C. Fetzer, D. Kanitz, T. Stoff, T. Becker, C. Holz, and P. Baudisch. Multitoe: High-precision interaction with back-projected floors based on high-resolution multi-touch input. In *UIST 2010 - 23rd ACM Symposium on User Interface Software and Technology*, pp. 209–218, 2010. doi: 10.1145/1866029.1866064
- [4] A. Bazo, R. Wimmer, M. Heckner, and C. Wolff. Collaboration on Interactive Ceilings. In *Mensch & Computer 2013 - Workshopband*, pp. 299–304. Oldenbourg Verlag, 2013. doi: 10.1524/9783486781236.299
- [5] A. Bränzel, C. Holz, D. Hoffmann, D. Schmidt, M. Knaust, P. Lühne, R. Meusel, S. Richter, and P. Baudisch. GravitySpace: Tracking users and their poses in a smart room using a pressure-sensing floor. In *Conference on Human Factors in Computing Systems - Proceedings*, pp. 725–734. ACM, New York, NY, USA, 2013. doi: 10.1145/2470654.2470757
- [6] J. R. Cauchard, M. Fraser, T. Han, and S. Subramanian. Steerable projection: Exploring alignment in interactive mobile displays. *Personal and Ubiquitous Computing*, 16(1):27–37, 2012. doi: 10.1007/s00779-011-0375-3
- [7] A. Dancu, Z. Franjeic, A. A. Ünlüer, and M. Fjeld. Interaction in motion with mobile projectors: Design considerations. In *PerDis 2015 - Proceedings: 4th ACM International Symposium on Pervasive Displays*, pp. 61–68. ACM, New York, NY, USA, 2015. doi: 10.1145/2757710.2757728
- [8] J. Franz, J. Malloch, and D. Reilly. Compensating for Perspective-based Distortion on Large Interactive Floor Displays: The SpaceHopper Field Experiment. In *IMX 2020 - Proceedings of the 2020 ACM International Conference on Interactive Media Experiences*, vol. 20, pp. 45–54. Association for Computing Machinery, Inc, New York, NY, USA, 2020. doi: 10.1145/3391614.3393651
- [9] K. Fujita, Y. Itoh, K. Takashima, K. Nakajima, Y. Hayashi, and F. Kishino. Ambient party room: A room-shaped system enhancing communication for parties or gatherings. In *Proceedings - IEEE Virtual Reality*, 2013. doi: 10.1109/VR.2013.6549436
- [10] A. Gonçalves and M. Cameirão. Evaluating body tracking interaction in floor projection displays with an elderly population. In *PhysCS 2016 - Proceedings of the 3rd International Conference on Physiological Computing Systems*, pp. 24–32. SCITEPRESS - Science and Technology Publications, 2016. doi: 10.5220/0005938900240032
- [11] S. Hirai and M. Takamura. Everyday Life ToDo Display on Ceiling for Smart Living Space. In *2019 IEEE International Conference on Pervasive Computing and Communications Workshops, PerCom Workshops 2019*, pp. 239–242, 2019. doi: 10.1109/PERCOMW.2019.8730584
- [12] P. Knierim, S. Maurer, K. Wolf, and M. Funk. Quadcopter-projected in-situ navigation cues for improved location awareness. In *Conference on Human Factors in Computing Systems - Proceedings*, vol. 2018-April. Association for Computing Machinery, 2018. doi: 10.1145/3173574.3174007
- [13] A. W. Law, J. W. Ip, B. V. Peck, Y. Visell, P. G. Kry, and J. R. Cooperstock. Multimodal floor for immersive environments. In *ACM SIGGRAPH 2009 Emerging Technologies, SIGGRAPH '09*. Association for Computing Machinery (ACM), 2009. doi: 10.1145/1597956.1597972
- [14] M. Leung, M. Tomitsch, and A. V. Moere. Designing a personal visualization projection of online social identity. In *Conference on Human Factors in Computing Systems - Proceedings*, pp. 1843–1848. ACM Press, New York, USA, 2011. doi: 10.1145/1979742.1979882
- [15] T. Matsumoto, M. Yamazaki, Y. Igarashi, R. Yoshida, and M. Shiraiishi. Smart Elevator Hall: Prototype of In-building Guiding Using Interactive Floor Display. In *ISS 2020 - Companion - Proceedings of the 2020 Conference on Interactive Surfaces and Spaces*, pp. 15–18. ACM, New York, NY, USA, 2020. doi: 10.1145/3380867.3426207
- [16] M. Meagher, J. Huang, and D. Gerber. Revisiting the open plan: Ceilings and furniture as display surfaces for building information. In *Proceedings of the International Conference on Information Visualisation*, pp. 601–606, 2007. doi: 10.1109/IV.2007.98
- [17] B. Monastero and D. K. McGookin. Traces: Studying a public reactive floor-projection of walking trajectories to support social awareness. In

- Conference on Human Factors in Computing Systems - Proceedings*, vol. 2018-April, pp. 1–13. Association for Computing Machinery, New York, USA, 2018. doi: 10.1145/3173574.3174061
- [18] F. Müller, J. McManus, S. Günther, M. Schmitz, M. Mühlhäuser, and M. Funk. Mind the tap: Assessing foot-taps for interacting with head-mounted displays. In *Conference on Human Factors in Computing Systems - Proceedings*, p. 13. ACM, New York, NY, USA, 2019. doi: 10.1145/3290605.3300707
- [19] J. H. Oh, Y. Jung, Y. Cho, C. Hahm, H. Sin, and J. Lee. Hands-up: motion recognition using kinect and a ceiling to improve the convenience of human life. *Proceedings of CHI 2012 Extended Abstracts*, pp. 1655–1660, 2012.
- [20] S. Ota, Y. Takegawa, T. Terada, and M. Tsukamoto. A method for wearable projector selection that considers the viewability of projected images. In *Computers in Entertainment*, vol. 8, pp. 1–16. ACM PUB27 New York, NY, USA, 2010. doi: 10.1145/1902593.1902596
- [21] M. Otto, E. Lampen, P. Agethen, G. Zachmann, and E. Rukzio. Using large-scale augmented floor surfaces for industrial applications and evaluation on perceived sizes: Personal and ubiquitous computing—theme issue on pervasive displays. *Personal and Ubiquitous Computing*, pp. 1–16, 2020. doi: 10.1007/s00779-020-01433-z
- [22] E. Pereira, S. Kolb, K. Schäfers, S. Schreiber, V. Weckbach, W. Goodwin, C. Smith, P. Kaiser, and K. Kohler. Stars: Enlightenment in the office space for behavioral change. In *UbiComp 2016 Adjunct - Proceedings of the 2016 ACM International Joint Conference on Pervasive and Ubiquitous Computing*, pp. 1640–1645. Association for Computing Machinery, Inc, 2016. doi: 10.1145/2968219.2968527
- [23] M. G. Petersen, P. G. Krogh, M. Ludvigsen, and A. Lykke-Olesen. Floor interaction hci reaching new ground. In *Conference on Human Factors in Computing Systems - Proceedings*, pp. 1717–1720. ACM Press, New York, USA, 2005. doi: 10.1145/1056808.1057005
- [24] A. J. Reiner, J. G. Hollands, G. A. Jamieson, and S. Boustila. A mirror in the sky: assessment of an augmented reality method for depicting navigational information. *Ergonomics*, 63(5):548–562, 2020. doi: 10.1080/00140139.2020.1737738
- [25] P. Renner and T. Pfeiffer. AR-glasses-based attention guiding for complex environments: Requirements, classification and evaluation. In *ACM International Conference Proceeding Series*, pp. 231–240. ACM, New York, NY, USA, 2020. doi: 10.1145/3389189.3389198
- [26] N. Sakata, F. Sato, T. Tominaga, and Y. Hijikata. Extension of smartphone by wearable input/output interface with floor projection. In *Lecture Notes in Computer Science (including subseries Lecture Notes in Artificial Intelligence and Lecture Notes in Bioinformatics)*, vol. 10397 LNCS, pp. 168–181. Springer Verlag, 2017. doi: 10.1007/978-3-319-63088-5_15
- [27] F. Sato, T. Tominaga, Y. Hijikata, and N. Sakata. Floor interaction with wearable projection interface using hand and toe. In *Communications in Computer and Information Science*, vol. 647, pp. 105–116. Springer Verlag, 2016. doi: 10.1007/978-981-10-2618-8_9
- [28] D. Schmidt, J. Frohnhofen, S. Knebel, F. Meinel, M. Perchyk, J. Risch, J. Striebel, J. Wachtel, and P. Baudisch. Ergonomic interaction on touch floors. In *Conference on Human Factors in Computing Systems - Proceedings*, vol. 2015-April, pp. 3879–3888. Association for Computing Machinery, 2015. doi: 10.1145/2702123.2702254
- [29] S. Schmidt, F. Steinicke, A. Irlitti, and B. H. Thomas. Floor-Projected Guidance Cues for Collaborative Exploration of Spatial Augmented Reality Setups. In *Proceedings of the 2018 ACM International Conference on Interactive Surfaces and Spaces, ISS 2018, Tokyo, Japan, November 25-28, 2018*, pp. 279–289. ACM Press, New York, USA, 2018. doi: 10.1145/3279778.3279806
- [30] M. Soga, K. Matsui, K. Takaseki, and K. Tokoi. Interactive learning environment for astronomy with finger pointing and augmented reality. In *Proceedings - The 8th IEEE International Conference on Advanced Learning Technologies, ICALT 2008*, pp. 542–543, 2008. doi: 10.1109/ICALT.2008.144
- [31] T. Thi Minh Tran and C. Parker. Designing exocentric pedestrian navigation for AR head mounted displays. In *Conference on Human Factors in Computing Systems - Proceedings*. Association for Computing Machinery, 2020. doi: 10.1145/3334480.3382868
- [32] M. Tomitsch and T. Grechenig. Reaching for the Ceiling: Exploring Modes of Interaction. *Adjunct Proceedings of the ...*, pp. 2–5, 2007.
- [33] M. Tomitsch, T. Grechenig, and S. Mayrhofer. Mobility and emotional distance: exploring the ceiling as an ambient display to provide remote awareness. In *IET Conference Publications*, number 531 CP, pp. 164–167, 2007. doi: 10.1049/cp:20070362
- [34] M. Tomitsch, T. Grechenig, A. Vande Moere, and S. Renan. Information sky: Exploring the visualization of information on architectural ceilings. In *Proceedings of the International Conference on Information Visualisation*, pp. 100–105, 2008. doi: 10.1109/IV.2008.81
- [35] V. Vechev, A. A. Ünlüer, and A. Dancu. Medium and transition in mobile projected interfaces. In *MobileHCI 2015 - Proceedings of the 17th International Conference on Human-Computer Interaction with Mobile Devices and Services Adjunct*, pp. 1134–1137. Association for Computing Machinery, Inc, 2015. doi: 10.1145/2786567.2794341
- [36] J. Vermeulen, K. Luyten, K. Coninx, N. Marquardt, and J. Bird. Proxemic flow: Dynamic peripheral floor visualizations for revealing and mediating large surface interactions. In *Lecture Notes in Computer Science (including subseries Lecture Notes in Artificial Intelligence and Lecture Notes in Bioinformatics)*, vol. 9299, pp. 264–281, 2015. doi: 10.1007/978-3-319-22723-8_22
- [37] R. Wimmer, A. Bazo, M. Heckner, and W. Christian. Ceiling Interaction: Properties, Usage Scenarios, and a Prototype. In *ACM Conference on Human Factors in Computing Systems, Workshop on Blended Interaction: Envisioning Future Collaborative Interactive Spaces*, 2013.
- [38] C. Winkler, J. Seifert, D. Dobbelsstein, and E. Rukzio. Pervasive information through constant personal projection: The ambient mobile pervasive display (AMP-D). In *Conference on Human Factors in Computing Systems - Proceedings*, pp. 4117–4126. ACM, New York, NY, USA, 2014. doi: 10.1145/2556288.2557365